


PC Thinlam®

ISO 18000-6c

- Thinnest RFID prelaminate available, based on Flip-Chip technology
- High card surface quality without dents and dimples and good printability
- Consistent reproducible antenna geometries and read range

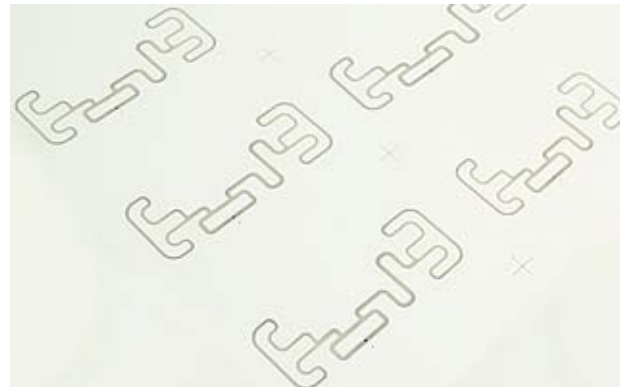

Applications

Access Control

Traffic control systems, corporate parking lots, car rental parks, premises access, ski access, events

eGovernment:

eID cards, eDrivers license, border control

Specifications

Product thickness	approx. 260µm	Integrated Circuit	Impinj Monza 4 family
Substrate	Polycarbonate, white		
Antenna	conductive silver ink		(Chip alternatives upon request)
Operating frequency	860 to 928MHz	Delivery form	all common card industry formats max. sheet format 56up

Features and Options

Reliability: acc. to ISO 10373-1

For further information please contact the KSW Sales or Customer Service Team:
E-Mail: sales@ksw-microtec.de | Web: www.ksw-microtec.de | Phone.: +49 351 88 960 10